



DEXTER

- Heat Output ▪ 9.9kW av
- Efficiency ▪ 61% av
- Coverage ▪ up to 120m²
- Emissions ▪ 1.5 grams/kg

When the developers at Austroflamm crafted this beautiful fireplace, they realized that they also needed special technology to keep operation simple. For example, there are always only two subtle control elements on the Dexter: a door handle and a one-hand control for the supply of combustion air .

The door lock is opened by a slight pressure on the handle opposite the firebox so that the fireplace door can be swung open easily. Just as easily, the door automatically closes and locks itself back into the place. This closes the combustion chamber tightly, and with a two sided combustion chamber you have a choice of left-hand or right-hand side viewing.



The body of this stove is made of a strong steel shell with aluminium handles, and the firebox of this fireplace is equipped with a bright, Austroflamm-typical Hi-Tech Keramott lining.

With the Dexter your creativity knows no bounds. It offers many possible combinations with its clever module modules. These can also be used with their open side as a wood storage compartment and with the top and base boxes you determine the size and the shape of the structure making it your own unique combination.



Clearances	Dimensions	Features
------------	------------	----------

	Width	Depth	Thickness
Hearth depth inc 300mm in front and 175 top Rear. Thickness: Equal to 9mm Bellis Board or equivalent	1120	900	9

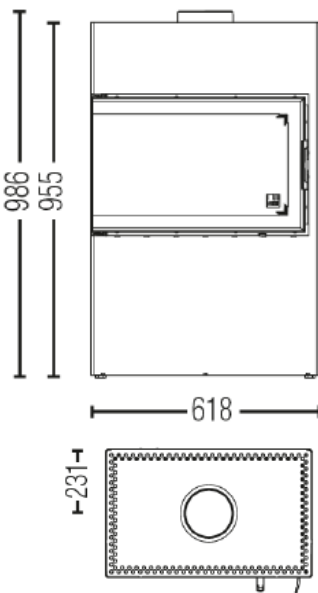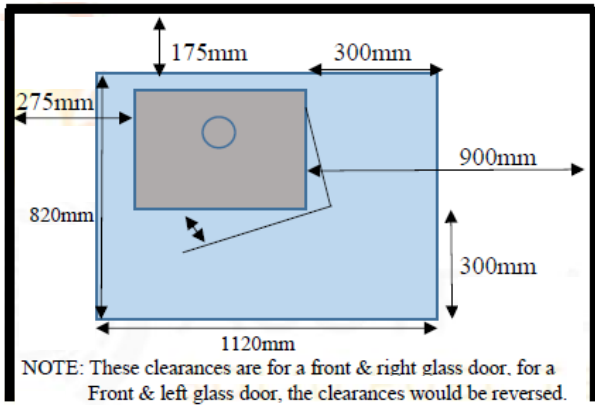


STANDARD FEATURES

- Two sided combustion chamber, with your choice of left-hand or right-hand viewing
- Smart modular system offers many possible combination. Personalize your fireplace and integrate it perfectly into your living environment according to your needs. Add modules [boxes] to the side, top or bottom, as wood storage or bench
- Keramott Lining: a development exclusive to Austroflamm, this material excels by an exceptional ratio between thermal insulation and heat conduction. As a consequence the combustion chamber reaches higher temperatures sooner
- Superior air wash cleaning system. Air currents sweep the inner part of the glass, keeping it free of dust and particles for unparalleled fire viewing
- Self-locking door automatically closes and locks itself back into place
- Single air control for ease of operation. The one-hand control for the air supply is a small lever that can be easily be adjusted for more or less combustion air in the chamber. Allowing you to control the burn.
- Vertical smoke exit through the top with the option to switch to a Horizontal smoke exit through the Rear
- Weight : 160kilos
- Maximum log width : 300mm
- Flue Spigot Size : Ø 150mm 6inch
- Minimum Dimensions with Top Extension : 1146mm high
- Internal Firebox : 480[w] x 240[d] x 380[h]
- Viewing Area : 561[w] x 340[h] x 325 [right angle]
- Warranty : Limited 6 years manufactures

Flue Shield Configuration	Rear	Side	Front	Corner
Parallel Installation with RH Glass Side	175	[R] 900 [L] 275	300	-
Parallel Installation with LH Glass Side	175	[R] 275 [L] 900	300	-

CLEARANCES BASED ON INSTALLATION WILDCAT 6" TRIPLE SKIN FLUE KIT WITH 8" SOLID CASINGSOLID DECORATIVE FLUE SHIELD AND A MINIMUM OF ONE TOP EXTENSION BOX : [R] RIGHT HAND SIDE [L] LEFT HAND SIDE

Information supplied is to assist you in your choice of a suitable fire. It is not intended to be all the information required to install the fire and does not replace the installation manual which provides more detailed information. In the interest of product development Austroflamm reserves the right to change specifications without prior notice.

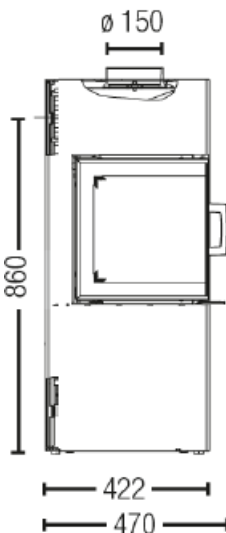

All measurements are in millimetres unless otherwise stated.