

1410

(Squirrel Model MOH1410)

Heat Output	▪	6.8kW av Peak
Efficiency	▪	65% av
Coverage	▪	up to 90m ²
Emissions	▪	1.4 grams/kg

The 1410 is a result of Moros's technical expertise and advancement in the cast iron heating industry. The innovation for the 1410 comes from their 167 years of experience constructing cast iron products to combine both the latest technology with a quality and user-friendly design.

Despite its compact design, this wood burning fireplace has a powerful 6.8kW of rated output, making it ideal for a country cottage, city living or smaller spaces.

Handcrafted in Denmark this fire has a separate bottom ash door and external riddler. A top air control lets you adjust for secondary burning and the bottom control allows for fine-tuning the combustion rate.

Internally the 1410 has an air wash system that circulates air around the fire and flushes it over the glass to keep the viewing window clear. It is also equipped with a riddling grate and ash pan which allows for a clean and convenient disposal off ashes.

Danish design has been delighting the world for many years, and the architects and designers at Morso have made Danish design a real talking point. In 1915 Morso received the honour of being appointed to the Royal Danish Court. This prestigious appointment means that the products produced are held to the highest standards of quality.







Clearances

Dimensions

Features

	Width	Depth	Thickness
Hearth depth inc 300 in front. Thickness: Equal to 6mm fibre cement sheet	788	818	6

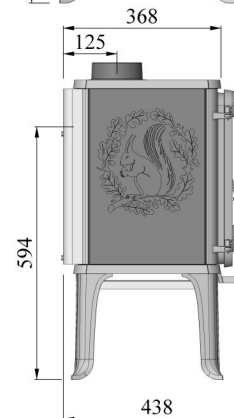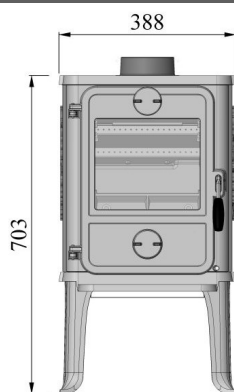

STANDARD FEATURES

- Non catalytic clean burn technology for more complete combustion and high heat output
- Superior air wash system keeps the glass clean for unparalleled fire viewing
- Rugged ash pan made of heavy gauge steel
- Gasketed cast iron stove plates provide a tighter seal that requires less maintenance through years of operation
- Vertical smoke exit through the top with the option to switch to a Horizontal smoke exit through the Rear
- Weight : 70kilos
- Maximum log width : 250mm
- Flue Spigot Size : Ø 150mm 6inch
- Internal Firebox : 310[w] x 280[d] x 240[h]
- Viewing Area : 163[w] x 234[h]
- Warranty : Limited 10 years manufactures

OPTIONAL ACCESSORIES

- Morso Classic Fire Tools [62900221]
- Morso Classic Cast Iron Trivet with NAC motif [61753201]
- Morso 1410 Short Leg Set 100[h] reduces the height by 150 N.B if using the short leg set the fireplace must be installed on a full masonry hearth [44141521]

Flue Shield Configuration	Rear [A]	Side [B]	Front	Corner
No shielding	-	-	-	-
Rear Flue Shield or Perforated Mesh	150	600	300	600

CLEARANCES BASED ON INSTALLATION STANDARD 6" FLUE KIT WITH 900MM STAINLESS STEEL FLUE SHIELD OR PERFORATED MESH FLUE

Information supplied is to assist you in your choice of a suitable fire. It is not intended to be all the information required to install the fire and does not replace the installation manual which provides more detailed information. In the interest of product development Morso reserves the right to change specifications without prior notice.

All measurements are in millimetres unless otherwise stated.